




Flotec Compac 200

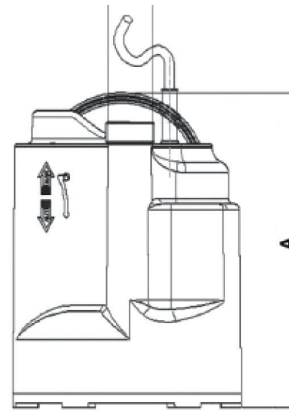

- Submersible polypropylene pump designed for clean water
- Suitable for pumping water from swimming pools, pits or flooded areas
- Both auto and manual float switch operation are available. In auto mode the pump turns on at rising water (140 mm) and off (30 mm), and in manual mode it can pump down to 3 mm
- Has a stainless steel motor shaft
- 10m power cable

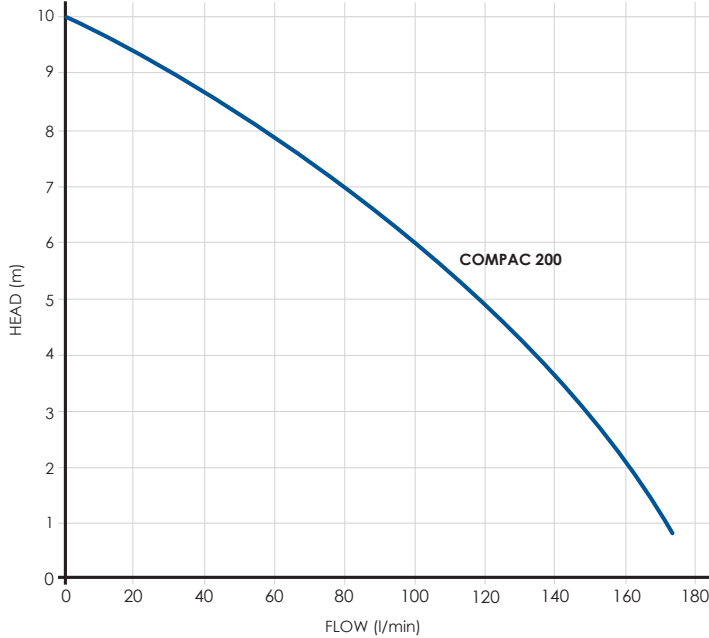

PERFORMANCE GUIDE							
Code	Max Head (m)	Max Flow (l/min)	Max Pressure (psi)	Max Submersible Depth (m)	Max Solid (mm)	Outlet (mm)	Float
PUFLOCOMPAC200	10	190	14	7	5	32	Internal

ELECTRICAL DATA									
Code	Current Type	kW	Hp	Amps	RPM/min	Capacitor (µF)	Insulation Class	Voltage (V)	Frequency (Hz)
PUFLOCOMPAC200	Single	0.65	0.88	2.9	2850	8	F	230	50

DIMENSIONS + WEIGHTS				
Code	A (mm)	C (mm)	D (mm)	Weight (kg)
PUFLOCOMPAC200	273	200	170	5.6

All data, performance curves, and dimensions provided are for general guidance only. Performance may vary depending on operating conditions and fluid properties. Refer to the product manual for complete specifications, installation requirements, and confirmed dimensions. Specifications are subject to change without notice.

